


Inspiron 14 7425 2-in-1

Setup and Specifications

LaptopVANG.com

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

LaptopVANG.com

Contents

Chapter 1: Set up your Inspiron 14 7425 2-in-1	4
Chapter 2: Views of Inspiron 14 7425 2-in-1	6
Right.....	6
Left.....	6
Top.....	7
Front.....	8
Bottom.....	9
Modes.....	9
Chapter 3: Using the privacy shutter	11
Chapter 4: Specifications of Inspiron 14 7425 2-in-1	12
Dimensions and weight.....	12
Processor.....	12
Chipset.....	13
Operating system.....	13
Memory.....	13
External ports.....	14
Internal slots.....	14
Wireless module.....	14
Audio.....	15
Storage.....	15
Media-card reader.....	16
Keyboard.....	16
Camera.....	16
Touchpad.....	17
Power adapter.....	17
Battery.....	18
Display.....	19
GPU—Integrated.....	20
Operating and storage environment.....	20
Chapter 5: ComfortView	21
Chapter 6: Keyboard shortcuts	22
Chapter 7: Getting help and contacting Dell	24

Set up your Inspiron 14 7425 2-in-1

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

1. Connect the power adapter and press the power button.



NOTE: To conserve battery power, the battery might enter power-saving mode. Connect the power adapter and press the power button to turn on the computer.

2. Finish Windows setup.

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.

NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign in with or create a Microsoft account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 1. Locate Dell apps in Windows in S-mode


Resources	Description
	<p>Dell Product Registration</p> <p>Register your computer with Dell.</p>

Table 1. Locate Dell apps in Windows in S-mode (continued)









Resources	Description
	<p>Dell Help & Support</p> <p>Access help and support for your computer.</p>
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

Table 2. Locate Dell apps in Windows

Resources	Description
	<p>My Dell</p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information on using Dell Update, search in the Knowledge Base Resource at www.dell.com/support.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information on using Dell Digital Delivery, search in the Knowledge Base Resource at www.dell.com/support.</p>
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>

Views of Inspiron 14 7425 2-in-1

Right



1. SD-card slot

Reads from and writes to the SD card. The computer supports the following card types:

- Secure Digital (SD)
- Secure Digital High Capacity (SDHC)
- Secure Digital Extended Capacity (SDXC)


2. USB 3.2 Gen 1 port

Connect devices such as external storage devices and printers. Provides data transfer speeds up to 5 Gbps.

3. Global headset jack

Connect headphones or a headset (headphone and microphone combo).

Left

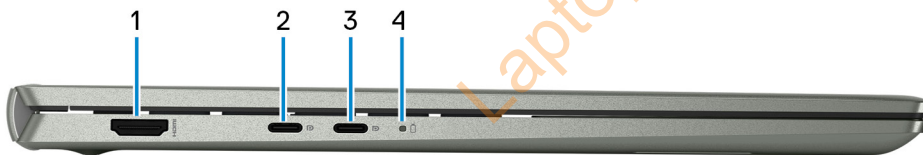

1. HDMI port

Connect to a TV, external display or another HDMI-in enabled device. Provides video and audio output.

2. USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 and Power Delivery

Connect devices such as external storage devices, printers, and external displays.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 15 W power output that enables faster charging.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

3. USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 and Power Delivery

Connect devices such as external storage devices, printers, and external displays.

Supports Power Delivery that enables two-way power supply between devices. Provides up to 15 W power output that enables faster charging.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

4. Power and battery-status light

Indicates the power state and battery state of the computer.

Solid white—Power adapter is connected and the battery is charging.

Solid amber—Battery charge is low or critical.

Off—Battery is fully charged.

Top




1. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 10 seconds to force shut-down the computer.

If the power button has a fingerprint reader, place your finger on the power button to log in.



NOTE: The highlighted area indicates the actual active fingerprint reader area and the image is for illustration purposes only.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

NOTE: The power-status light on the power button is available only on computers without the fingerprint reader. Computers that are shipped with the fingerprint reader that is integrated on the power button will not have the power-status light on the power button.

2. Right-click area

Press to right-click.

3. Left-click area

Press to left-click.

4. Touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front



1. Left microphone

Provides digital sound input for audio recording and voice calls.

2. Privacy shutter

Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

3. Camera

Enables you to video chat, capture photos, and record videos.


4. Camera-status light

Turns on when the camera is in use.

5. Right microphone

Provides digital sound input for audio recording and voice calls.

Bottom

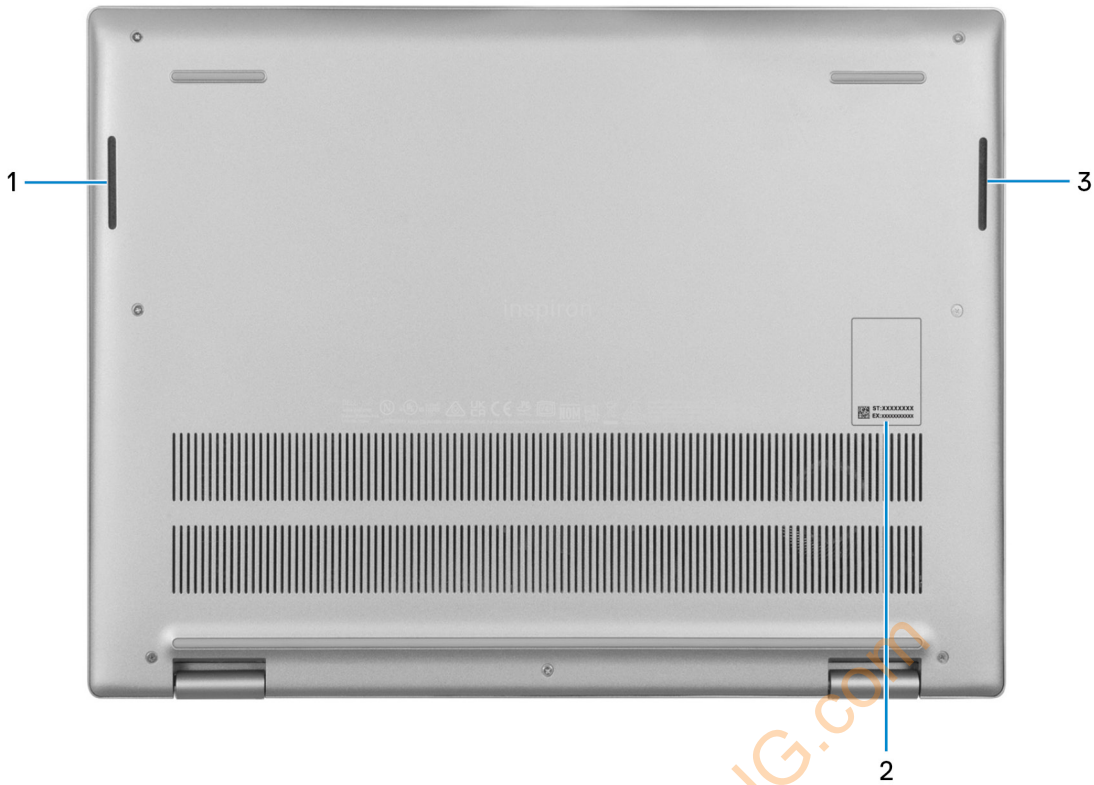

- 1. Left speaker**
Provides audio output.
- 2. Service Tag label**
The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.
- 3. Right speaker**
Provides audio output.

Modes

Notebook



Tablet



Stand



Tent



LaptopVANG.com

Using the privacy shutter

1. Slide the privacy shutter to the left to access the camera lens.
2. Slide the privacy shutter to the right to cover the camera lens.




Specifications of Inspiron 14 7425 2-in-1

Dimensions and weight

The following table lists the height, width, depth, and weight of your Inspiron 14 7425 2-in-1.

Table 3. Dimensions and weight

Description	Values
Height:	
Front height	15.70 mm (0.61 in.)
Rear height	17.86 mm (0.70 in.)
Width	314 mm (12.36 in.)
Depth	227.50 mm (8.95 in.)
Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	1.73 kg (3.81 lb)

Processor

The following table lists the details of the processors supported by your Inspiron 14 7425 2-in-1.

Table 4. Processor

Description	Option one	Option two
Processor type	AMD Ryzen 5 5625U	AMD Ryzen 7 5825U
Processor wattage	25 W	25 W
Processor core count	6	8
Processor thread count	12	16
Processor speed	Up to 4.30 GHz	Up to 4.50 GHz
Processor cache	16 MB	16 MB
Integrated graphics	AMD Radeon Graphics	AMD Radeon Graphics

Chipset

The following table lists the details of the chipset supported by your Inspiron 14 7425 2-in-1.

Table 5. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	AMD Ryzen 5/7
DRAM bus width	128-bit
Flash EPROM	16 MB
PCIe bus	Up to Gen3

Operating system

Your Inspiron 14 7425 2-in-1 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Windows 11 Home in S-mode

Memory

The following table lists the memory specifications of your Inspiron 14 7425 2-in-1.

Table 6. Memory specifications

Description	Values
Memory slots	Two-SODIMM slots
Memory type	DDR4
Memory speed	3200 MHz
Maximum memory configuration	32 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 12 GB, 16 GB, and 32 GB
Memory configurations supported	<ul style="list-style-type: none">• 4 GB, 1 x 4 GB, DDR4, 3200 MHz• 8 GB, 2 x 4 GB, DDR4, 3200 MHz, dual-channel• 8 GB, 1 x 8 GB, DDR4, 3200 MHz• 12 GB, 1 x 4 GB + 1 x 8 GB, DDR4, 3200 MHz• 16 GB, 2 x 8 GB, DDR4, 3200 MHz, dual-channel• 16 GB, 1 x 16 GB, DDR4, 3200 MHz• 32 GB, 2 x 16 GB, DDR4, 3200 MHz, dual-channel

External ports

The following table lists the external ports on your Inspiron 14 7425 2-in-1.

Table 7. External ports

Description	Values
USB ports	<ul style="list-style-type: none"> Two USB 3.2 Gen 2 Type-C port with DisplayPort 1.4 and PowerDelivery One USB 3.2 Gen 1 port
Audio port	One global headset jack
Video port/ports	One HDMI 1.4 port
Media-card reader	One SD-card slot
Power-adaptor port	Type-C adapter
Security-cable slot	Not supported

Internal slots

The following table lists the internal slots of your Inspiron 14 7425 2-in-1.

Table 8. Internal slots

Description	Values
M.2	<ul style="list-style-type: none"> One M.2 2230 slot for WiFi and Bluetooth combo card One M.2 2230/2280 slot for solid-state drive <p>NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support.</p>

Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules supported on your Inspiron 14 7425 2-in-1.

Table 9. Wireless module specifications

Description	Option one	Option two
Model number	MT7921	WCN6856-DBS
Transfer rate	Up to 1200 Mbps	Up to 3571 Mbps
Frequency bands supported	2.4 GHz/5 GHz	2.4 GHz/5 GHz/6 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6E (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP 	<ul style="list-style-type: none"> 64-bit/128-bit WEP AES-CCMP

Table 9. Wireless module specifications (continued)

Description	Option one	Option two
	<ul style="list-style-type: none"> TKIP 	<ul style="list-style-type: none"> TKIP
Bluetooth	Bluetooth 5.2	Bluetooth 5.2

Audio

The following table lists the audio specifications of your Inspiron 14 7425 2-in-1.

Table 10. Audio specifications

Description	Values	
Audio controller	Realtek ALC3254-CG	
Stereo conversion	Supported	
Internal audio interface	High-definition audio	
External audio interface	Universal audio jack	
Number of speakers	Two	
Internal-speaker amplifier	Supported	
External volume controls	Keyboard shortcut controls	
Speaker output:		
	Average speaker output	2 W
	Peak speaker output	4 W
Subwoofer output	Not supported	
Microphone	Dual-array microphones	

Storage

This section lists the storage options on your Inspiron 14 7425 2-in-1.

Your Inspiron 7425 2-in-1 supports one M.2 2230/2280 solid-state drive.

Table 11. Storage specifications

Storage type	Interface type	Capacity
One M.2 2230 solid-state drive	PCIe Gen3 x4 NVMe, up to 32 Gbps	Up to 1 TB
One M.2 2230 solid-state drive	PCIe Gen4 x4 NVMe, up to 32 Gbps	Up to 1 TB
One M.2 2280 solid-state drive	PCIe Gen3 x4 NVMe, up to 32 Gbps	Up to 1 TB
One M.2 2280 solid-state drive	PCIe Gen4 x4 NVMe, up to 32 Gbps	Up to 2 TB

Media-card reader

The following table lists the media cards supported by your Inspiron 14 7425 2-in-1.

Table 12. Media-card reader specifications

Description	Values
Media-card type	One SD-card slot
Media-cards supported	<ul style="list-style-type: none">Secure Digital (SD)Secure Digital High Capacity (SDHC)Secure Digital Extended Capacity (SDXC)
NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Keyboard

The following table lists the keyboard specifications of your Inspiron 14 7425 2-in-1.

Table 13. Keyboard specifications

Description	Values
Keyboard type	Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none">United States and Canada: 79 keysUnited Kingdom: 80 keysJapan: 83 keys
Keyboard size	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p>NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p> <p>For more information, see Keyboard shortcuts.</p>

Camera

The following table lists the camera specifications of your Inspiron 14 7425 2-in-1.

Table 14. Camera specifications

Description	Values
Number of cameras	One
Camera type	FHD camera

Table 14. Camera specifications (continued)

Description		Values
Camera location		Front camera
Camera sensor type		CMOS sensor technology
Camera resolution:		
	Still image	2.07 megapixel
	Video	1920 x 1080 (FHD) at 30 fps
Diagonal viewing angle:		86.3 degrees

Touchpad

The following table lists the touchpad specifications of your Inspiron 14 7425 2-in-1.

Table 15. Touchpad specifications

Description		Values
Touchpad resolution:		
	Horizontal	1229
	Vertical	749
Touchpad dimensions:		
	Horizontal	115 mm (4.53 in.)
	Vertical	80 mm (3.14 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article at support.microsoft.com .


Power adapter

The following table lists the power adapter specifications of your Inspiron 14 7425 2-in-1.

Table 16. Power adapter specifications

Description		Values
Type		USB Type-C 65 W
Power-adapter dimensions:		
	Height	28 mm (1.10 in.)
	Width	51 mm (2 in.)
	Depth	112 mm (4.40 in.)
Input voltage		100 VAC–240 VAC
Input frequency		50 Hz–60 Hz

Table 16. Power adapter specifications (continued)

Description		Values
Input current (maximum)		1.60 A/1.70 A
Output current (continuous)		3.25 A/3 A/3 A/3 A
Rated output voltage		20 VDC/15 VDC/9 VDC/5 VDC
Temperature range:		
	Operating	0°C to 40°C (32°F to 104°F)
	Storage	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Battery

The following table lists the battery specifications of your Inspiron 14 7425 2-in-1.

Table 17. Battery specifications




Description		Values
Battery type		54 Wh, 4-cell polymer
Battery voltage		15 VDC
Battery weight (maximum)		0.23 kg (0.51 lb)
Battery dimensions:		
	Height	5.75 mm (0.23 in.)
	Width	272 mm (10.71 in.)
	Depth	82 mm (3.23 in.)
Temperature range:		
	Operating	0°C to 45°C (32°F to 113°F)
	Storage	-20°C to 60°C (-4°F to 140°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate)		4 hours (when the computer is off)
 NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		
Coin-cell battery		CR2032
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Table 17. Battery specifications (continued)

Description	Values
 CAUTION: Dell recommends that you charge the battery regularly for optimal power consumption. If your battery charge is completely depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.	

Display

The following table lists the display specifications of your Inspiron 14 7425 2-in-1.

Table 18. Display specifications

Description	Values	
Display type	Full High Definition Plus (FHD+)	
Touch options	Yes	
Display-panel technology	Wide Viewing Angle (WVA)	
Display-panel dimensions (active area):		
	Height	301.59 mm (11.87 in.)
	Width	188.50 mm (7.42 in.)
	Diagonal	355.65 mm (14 in.)
Display-panel native resolution	1920 x 1200	
Luminance (typical)	250 nits	
Megapixels	2.30	
Color gamut	NTSC (45% typical)	
Pixels Per Inch (PPI)	162	
Contrast ratio (min)	600:1	
Response time (max)	35 ms	
Refresh rate	60 Hz	
Horizontal view angle	85 degrees	
Vertical view angle	85 degrees	
Pixel pitch	0.157 mm	
Power consumption (maximum)	3.53 W	
Anti-glare vs glossy finish	Glossy	

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Inspiron 14 7425 2-in-1.

Table 19. GPU—Integrated

Controller	Memory size	Processor
AMD Radeon Graphics	Shared system memory	AMD Ryzen 5/AMD Ryzen 7

Operating and storage environment

This table lists the operating and storage specifications of your Inspiron 14 7425 2-in-1.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 20. Computer environment

Description	Operating	Storage
Temperature range	0°C to 45°C (32°F to 115°F)	-20°C to 60°C (-4°F to 140°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10000 ft)	-15.2 m to 10668 m (-49.87 ft to 35000 ft)
⚠ CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Table 22. List of keyboard shortcuts (continued)

Function key	Behavior
fn + page down	Page down

LaptopVANG.com